


Boston

SX60 6 1/2-inch (165mm) Component Speakers

Specifications:	SX60
Nominal Size	6 1/2" (160/165mm)
RMS Power Handling	65w
Peak Power Handling	200w
Frequency Response (± 3 dB)	55-20kHz
Impedance	4 Ω
Sensitivity (1w/1M)	90dB

#	Description	Quantity
1	Type S2 3/4" Tweeter	2
2	SX60 Crossover	2
3	SX60 Woofer	2
4	SX60 Woofer Grille	2
5	Flush-Angle Tweeter Mount	2
6	Surface-Angle Tweeter Mount	2
7	SX60 Crossover Cover	2
8	Hex Head Screw	8
9	Spring Clip	8
10	Terminated Woofer Wire	2
11	Terminated Tweeter Wire	2
12	Spring Clip-Front	2
13	Spring Clip-Rear	2
14	M4x10mm (3/8")	2
15	M3x12mm (1/2")	2
16	M4x20mm (3/4")	8
17	#6 x 3/8" Silver Socket Head Screw	4
18	#8 x 1/8" Pan Head Screw	6
19	Nylon Washer	6
20	6" (160mm) Adapter Ring	2
21	6 1/2" (165mm) Adapter Ring	2
22	1/2" Spacer Ring	2
23	Woofer Gasket	4
not shown	16/18AWG. Connector Barrel	8
not shown	Hex Key	1


Woofer Dimensions

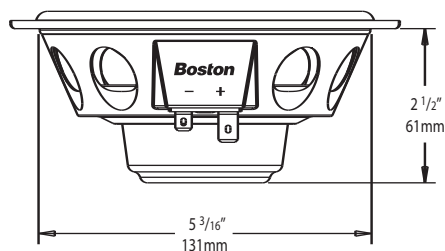




Boston Acoustics, Inc. 300 Jubilee Drive Peabody, Massachusetts 01960 U.S.A. bostonacoustics.com
© 2005 Boston Acoustics, Inc. All rights reserved. Boston, Boston Acoustics, and the Boston Acoustics logo are registered trademarks of Boston Acoustics, Inc.

042-002335-1




Crossover Dimensions

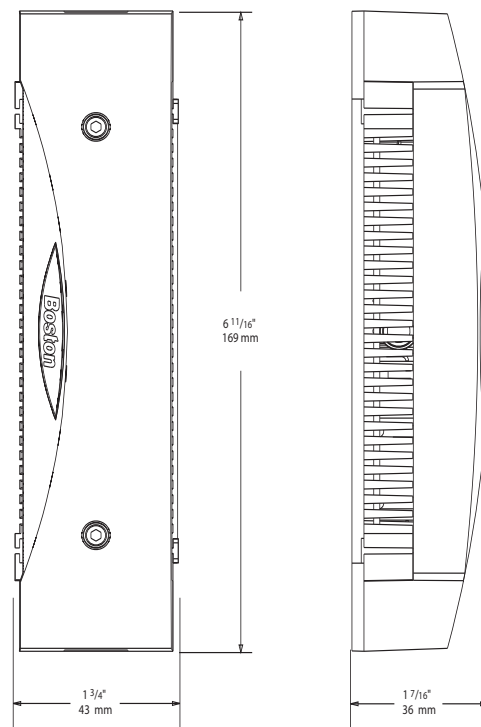

Surface-Angle Tweeter Mount Dimensions



Flush-Angle Tweeter Mount Dimensions




* Depth Without Spring Clip
** Depth With Spring Clip




Boston

SX60 6 1/2-inch (165mm) Component Speakers


Surface-Angle Mount

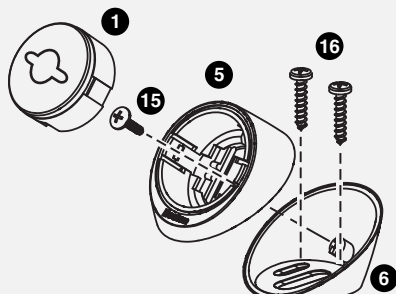


Flush-Angle Mount

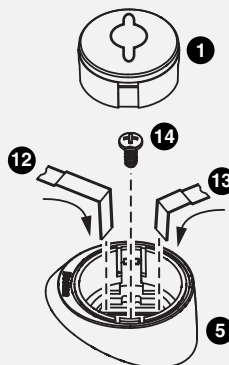


Tweeter Level Adjustment

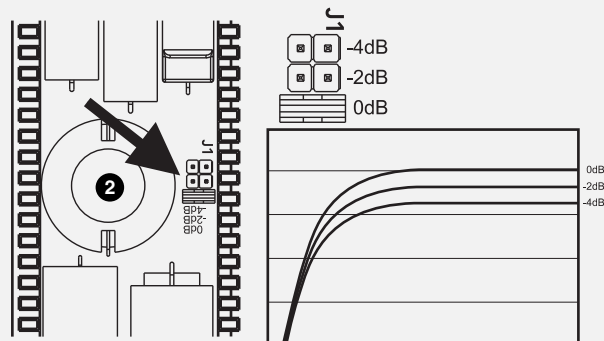


System Wiring

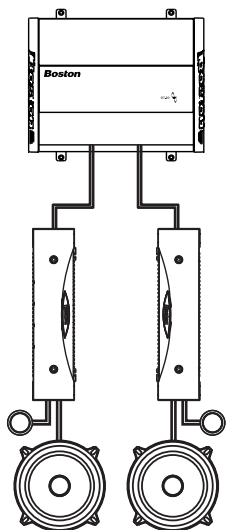


6-inch (160mm) Adapter



6 1/2-inch (165mm) Adapter

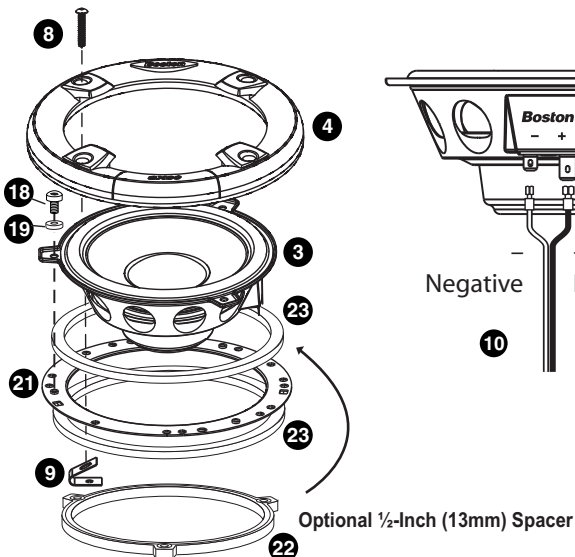

SX60 Woofer Wiring



Connecting Crossover Cases

